Jack Wechat

Jack Sewing
Machine Co.,Ltd.

JACK SEWING MACHINE CO.,LTD.

No. 15 Airport South Road Jiaojiang District Taizhou Zhejiang, PRC
TEL: 0086-576-88177782 88177767
FAX: 0086-576-88177787

E-mail: sales@chinajack.com
www.chinajack.com

Edition: September, 2015

JACK

China No.1

JACK

China No.1

ABOUT JACK

Established from August 27th, 2003 in Taizhou, Zhejiang, China, JACK SEWING MACHINE CO. LTD., start sewing machine industry from July 18, 1995. And ever since 2010, the sales of JACK is leading in global sales with the absolute advantage of lockstitch, overlock and interlock sewing machine, the sales of JACK is leading in global sales, the overall strength is NO.1 among the sewing machine industry.

Currently, JACK affiliated with GERMAN TOPCUT-BULLMER CO. LTD. , TAIZHOU TOPCUT-BULLMER MECHANICAL AND ELECTRICAL CO. LTD. , ZHEJIANG ZOBOW MECHANICAL AND ELECTRICAL TECHNOLOGY CO. LTD. the 8 main product series are spreading machines, automatic cutting machine, lockstitch, overlock, interlock, special machine, automatic pocket welting machine and energy-saving motors, all of these are widely applied in apparel, footwear, luggage, furniture, leather, automotive, aerospace and etc.

With more than 3,000 employees, including more than 1,000 engineers and technical staff, experts with lifelong enjoyment of the State Council, and senior expert from Japanese sewing machinery industry. Jack is always dedicated to innovation, and leading in product innovation and quality control, for example, the system certification such as ISO9000, ISO14000, and OHSAS18000, and CE certification.

CHINA NO.1

JACK vigorously promotes the integration of the two innovation, and enhance the ability to respond to the market changes quickly. With the corporate mission: provide the best sewing machinery with optimum cost-performance ratio to all, and the corporate spirit: harmony, honesty, struggling, rise, JACK keeping pace with the times, developing and innovating to follow up a new round of global industrial revolution, to build the "WISDOM FACTORY" with wisdom data, intelligent manufacturing and intelligence services, therefore making unremitting efforts to create "the NO.1 Sewing Machine Brand all Over the World".

JACK have got great achievement such as

NO.1 *of Sewing Machine Industry in China Light Industry Comprehensive Evaluation;*

No.1 *of Export Sales for Consecutive Eight Years;*

No.1 *Sales in Quantity in Sewing Machine Field all Around the Word.*

JACK is worthy the title of "China No.1"

Please kindly noted that JACK logo JACK is updated to new logo JACK . We believe, JACK will bring you more great experience.

JACK

China No.1

A4

The First Speaking Machine in the World

Good-looking, Speaking, Easy to use

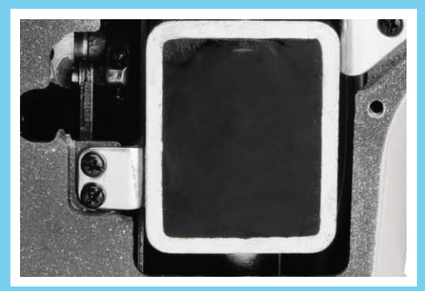

JACK

China No.1

900E

The Fastest Automatic Overlock Machine
Fastest, Sensor to Avoid Cutting Fabric
Increase Efficiency 35% to 100%

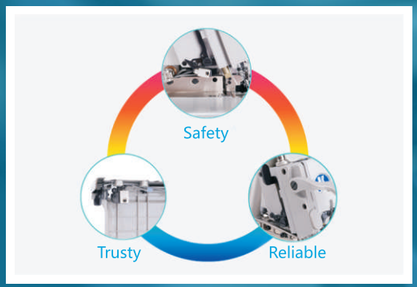

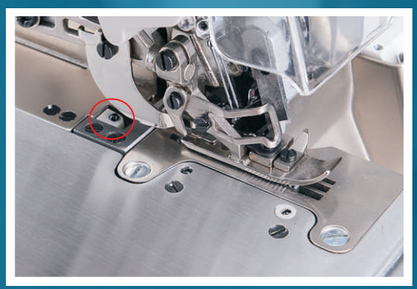

Product List

Overlock Machine

JK-900E ---------- 03
JK-798D ---------- 05
JK-798DIII ---------- 04
JK-800D ---------- 06

Lockstitch Machine

A4 ---------- 09
JK-58750D ---------- 13
JK-9300E ---------- 10
JK-5559WE ---------- 14
JK-9100B ---------- 11
JK-6380E-3B ---------- 15
JK-8720/609 ---------- 12
JK-8560WD/8558WD ---------- 16

Interlock Machine

JK-8569C-01GB/UT ---------- 19
JK-8669BDI ---------- 21
JK-8669C-01GB/UT ---------- 19
JK-8009VCDI ---------- 22
JK-8569ADI ---------- 20
JK-8009HF ---------- 22

Special Machine

JK-T10080 ---------- 25
JK-T1790B ---------- 30
JK-T3020 ---------- 26
JK-T1377E ---------- 31
JK-T5878-68 ---------- 27
JK-T781E ---------- 32
JK-T5878-58B ---------- 28
JK-T9270D ---------- 33
JK-T1900BSK/1903BSK ---------- 29
JK-513A ---------- 34

Symbol table

针送料	Needle Feed
综合送料	Compound Feed
上下送料	Top&Bottom Feed
立式大旋梭	Vertical Hook(Large)
立式标准旋梭	Vertical Hook (Standand)
摆 梭	Shuttle Hook
卧式标准旋梭	Horizontal Hook (Standard)
卧式大旋梭	Horizontal Hook (Large)
薄 料	Thin Material
中厚料	Mudium-heavy Material
厚料	Heavy Material
自动抬压脚	Auto Matic Presser Lifting
钉缝针数	Stitch Number
适用范围	Switable Material
针 数	Needle Number
机 针	Needle
离合式机针	Split Needle
自动抬压脚	Presser foot lifter
重 量	Weight
体 积	Volume
套结长度	Length of Bar Tacking
套结宽度	Width of Bar Tacking
套结针数	Stitch Number of Bar Tacking
特种剪线	Special Thread Trim
特种拨线	Special Thread Wiping
侧切刀功能	Side Cutting Function
特种线迹距离	Special Stitch Gauge
选针齿调节（锁眼机）	Dog Adjusting
锁眼尺寸（平）	Button Holing Size (straight)
锁眼尺寸（圆）	Button Holing Size (eyelet)
裁剪机	Cutting Machine
电 压	Rating Voltage
针迹宽度	Stitch Width
先切后缝	Sewing After Cutting
先缝后切	Cutting After Sewing
电子夹线器	Electronic tension post
钮扣直径	Button Diameter
钮孔尺寸	Button Hole Size
循环缝	Cycle Sewing
记忆功能	Memory Function
钮扣供给器	Button Provider
叠布功能	Overlapping Function
挡 线	Thread Wiper
开袋尺寸	Pocket Welting Size
裁剪宽度	Cutting Width
轨迹长度	Rail Length
针迹长度	Stitch length
功 率	Rating Power
电 源	Power
卧 式	Horizontal Type
摆 幅	Sewing range
针迹长度	Stitch length
线 数	Thread number
UT装置	UT device
加固线	Safty Stitch
模 式	Mode
缝料厚度	Materidl Thickness
针迹长度	Stitch length
自动剪线	Automatic Trimmer
转 速	Sewing Speed
压脚高度	Height of Presser Foot
差动比	Differential Ratio
针间距	Needle Gauge
下送料	Bottom Feed
弯 针	Looper
频 率	Rating Frequency
针杆行程	Needle Bar Stroke
箱体式	Box type
平板式	Flat-bed
筒 式	Cylinder type
平台式	Raised Flat-bed
打线凸轮外移	Out moved thread cam

Overlock Machine Series

JK-900E

Automatic Overlock Machine
Fastest, Sensor to Avoid Cutting Fabric

Advantages:

Fastest Speed, High Efficiency



Automatic Thread Trimming

Sensor to Avoid Cutting Fabric



Three-dimensional Protection

				(mm)	(mm)	(mm)		(mm)	(S.p.m)	(mm)	NW/GW (kg)
JK-903E-02/233	9#	1	3	-	4	3.8	0.7-2	5.5	7000	505×360×565	29.2/39.8
JK-903E-32R2/223	9#	1	3	-	1.5	3.8	0.7-2	5.5	7000	505×360×565	29.2/39.8
JK-904E-M03/333	9#	2	4	2	4	4.2	0.7-2	5.5	7000	505×360×565	29.2/39.8
JK-904E-M03/333/H/M	11#	2	4	2	4	4.2	0.7-2	6	7000	505×360×565	29.2/39.8
JK-905E-03/333	14#	2	5	3	4	3.8	0.7-2	5	7000	505×360×565	29.2/39.8
JK-905E-03/233	14#	2	5	5	5	3.8	0.7-2	5	7000	505×360×565	29.2/39.8
JK-905E-A04/435	19#	2	5	5	6	5	0.8-1.5	7	6500	505×360×565	29.2/39.8

JK-798DIII

Automatic Overlock Machine
Automatic Suction by Pneumatic

Advantages:

Easy to Operate



Automatic Thread Trimming



Automatic Suction by Pneumatic



Auto-sensing Quick Start Sewing

				(mm)	(mm)	(mm)		(mm)	(S.p.m)	(mm)	NW/GW (kg)
JK-798DIII-3-504-02/233	9#	1	3	-	4	3.8	0.7-2	5	7000	505x360x565	29.2/39.8
JK-798DIII-3-504-32R2/223	9#	1	3	-	1.5	3.8	0.7-2	5	7000	505x360x565	29.2/39.8
JK-798DIII-4-514-M03/333	9#	2	4	2	4	4.2	0.7-2	5.5	7000	505x360x565	29.2/39.8
JK-798DIII-4-514-M03/333/H/M	11#	2	4	2	4	4.2	0.7-2	6	7000	505x360x565	29.2/39.8
JK-798DIII-5-516-03/333	14#	2	5	3	4	3.8	0.7-2	5	7000	505x360x565	29.2/39.8
JK-798DIII-5-516-03/233	14#	2	5	5	5	3.8	0.7-2	5	7000	505x360x565	29.2/39.8
JK-798DIII-5-516-A04/435	19#	2	5	5	6	5	0.8-1.5	7	6500	505x360x565	29.2/39.8
JK-798TDI-4-514-M03/333	9#	2	4	2	4	4.2	0.7-2	5.5	7000	472x360x495	29.5/37
JK-798TDI-5-516-A04/435	19#	2	5	5	6	5	0.8-1.5	7	6500	472x360x495	29.5/37
JK-798TDI-5-516-03/333	14#	2	5	3	4	3.8	0.7-2	5	7000	472x360x495	29.5/37
JK-798TDI-4-514-A04/435	11#	2	4	2	4	6.5	0.8-1.5	6	6500	472x360x495	29.5/37
JK-798TDI-5-516-03/233	14#	2	5	5	5	3.8	0.7-2	5	7000	472x360x495	29.5/37

JK-798DIII by pneumatic; JK-798EP by electricity

JK-798D

Power Saving Overlock Machine
High Speed, High Efficiency

Advantages



Power Saving 71%

High Speed and Adjustable

Integrated

LED light

				(mm)	(mm)	(mm)		(mm)	(S.p.m)	(mm)	NW/GW (kg)
JK-798D-3-02/233	9#	1	3	-	4	3.8	0.7-2	5.5	6500	472x360x495	25.85/34.35
JK-798D-3-32R2/223	9#	1	3	-	1.5	3.8	0.7-2	5.5	6500	472x360x495	25.85/34.35
JK-798D-3-82/233	9#	1	3	-	4	3.8	0.7-2	5.5	6500	472x360x495	25.85/34.35
JK-798D-4-83/323	9#	2	4	2	4	4.2	0.7-2	5.5	6500	472x360x495	25.85/34.35
JK-798D-4-M03/333	9#	2	4	2	4	4.2	0.7-2	5.5	6500	472x360x495	25.85/34.35
JK-798D-4-M03/333/H/M	11#	2	4	2	4	4.2	0.7-2	6	6000	472x360x495	25.85/34.35
JK-798D-5-03/233	14#	2	5	5	5	3.8	0.7-2	5	6000	472x360x495	25.85/34.35
JK-798D-5-03/333	14#	2	5	3	4	3.8	0.7-2	5	6000	472x360x495	25.85/34.35
JK-798D-5-A04/435	19#	2	5	5	6	5	0.8-1.5	7	6000	472x360x495	25.85/34.35

the specification of JK-798 is sames as JK-798D.

JK-800D

Power Saving Overlock Machine
No Oil Leakage

Advantages:



Power Saving 71%

High Speed and Adjustable



No Oil Leakage



LED Light

				(mm)	(mm)	(mm)		(mm)	(S.p.m)	(mm)	NW/GW (kg)
JK-803D-M1-15	9#	1	3	-	1.5	4	0.7-2	5.5	6000	500×360×500	28.5/36.5
JK-803D-M2-04	11#	1	3	-	4	4	0.7-2	5.5	6000	500×360×500	28.5/36.5
JK-803D-M5-04/BK	11#	1	3	-	4	4	0.7-2	5.5	6000	500×360×500	28.5/36.5
JK-804D-M2-24	11#	2	4	2	4	4.2	0.7-2	5.5	6000	500×360×500	28.5/36.5
JK-804D-M5-23/BK	11#	2	4	2	3	4.2	0.7-2	5.5	6000	500×360×500	28.5/36.5
JK-805D-M2-35	14#	2	5	3	5	4	0.7-2	5	5500	500×360×500	28.5/36.5
JK-805D-M2-55	14#	2	5	5	5	4	0.7-2	5	5500	500×360×500	28.5/36.5
JK-805D×2-56	19#	2	5	5	6	4.2	0.7-1.4	6	5500	500×360×500	28.5/36.5

The Specification of JK-800 series is same as JK-800D series.

Lockstitch Machine Series

A4

Computerized Lockstitch Machine
Automatic Presser Foot Lifter

Advantages:

Voice Reminder

Easy to Learn Easy to Use

Auto. Presser Foot Lifter Sensor

Factory Reset

			(mm)	(mm)	(S.p.m)			A	M	H	(mm)	NW/GW (kg)
A4	DBX1 11-18#	2	5	5-13	5000	Standard	Standard	✓	✓		645x248x550	40/46
A4-H	DPX5 18-21#	2	5	5-13	3500	Standard	Standard			✓	645x248x550	40/46
A4-7	DBX1 11-18#	2	7	5-13	3500	Standard	Standard		✓		645x248x550	40/46
A4-7H	DPX5 18-21#	2	7	5-13	3500	Standard	Standard			✓	645x248x550	40/46

JK-9300E

Computerized Lockstitch Machine
Semi-dry System

Advantages:

Electronic Thread Tension



Automatic Presser Foot Lifter



Large Operation Space

Automatic Thread Trimming

			(mm)	(mm)	(S.p.m)			A	M	H	(mm)	NW/GW (kg)
JK-9300E	DBX1 11-18#	2	5	5-12	5000	Standard	Standard	✓	✓		695×315×670	43/50
JK-9300EH	DPX5 18-21#	2	5	5-12	3500	Standard	Standard			✓	695×315×670	43/50

JK-9100B

Power Saving Lockstitch Machine
Integrated

Advantages:



Power Saving 71%

Extra Thread Trimmer Knife



Needle Position, Easy to Adjust



High and Low Voltage Protect

			(mm)	(mm)	(S.p.m)	A	M	H	(mm)	NW/GW (kg)
JK-9100BS	DBX1 11-18#	2	5	5-13	5000	✓	✓		635x245x550	33.5/40.2
JK-9100BSH	DPX5 18-21#	2	5	5-13	3500			✓	635x245x550	33.5/40.2
JK-9100BS-7	DBX1 11-18#	2	7	5-13	3500		✓		635x245x550	33.5/40.2

JK-8720

Single Needle Lockstitch Machine

Advantages:

This is a cost-effective lockstitch sewing machine with reasonable structure, convenient functions, stable operation and very good performance such as automatic lubrication, stitch length adjustment and convenient back-tack stitch. Suitable for light, medium and heavy duty fabrics.

JK-609

Single Needle Lockstitch Machine for Heavy Duty

Advantages:

This is a cost-effective lockstitch sewing machine for heavy duty fabrics especially. With the big hook which is capable for 26 meters bobbin thread, reduce the frequency of thread-changing, increase the operation efficiency greatly. Suitable for jeans, tents, cushion, leather goods, etc.

			(mm)	(mm)	(S.p.m)	A	M	H	(mm)	NW/GW (kg)
JK-8720	DBX1 11-18#	2	5	5-13	5000	✓	✓		590x230x550	29.5/36.5
JK-8720H	DPX1 19-23#	2	5	5-13	4000			✓	590x230x550	29.5/36.5
JK-8900	DBX1 11-18#	2	5	5-13	5000	✓	✓		590x230x550	29.5/36.5
JK-8900H	DPX1 19-23#	2	5	5-13	4000			✓	590x230x550	29.5/36.5
JK-609	DPX5 14-21#	2	0-7	5.5-13	3000			✓	590x230x550	29.5/36.5
JK-608	DPX5 14-21#	2	0-7	5.5-13	3000			✓	590x230x550	29.5/36.5

JK-609 is big hook, JK-608 is small hook.

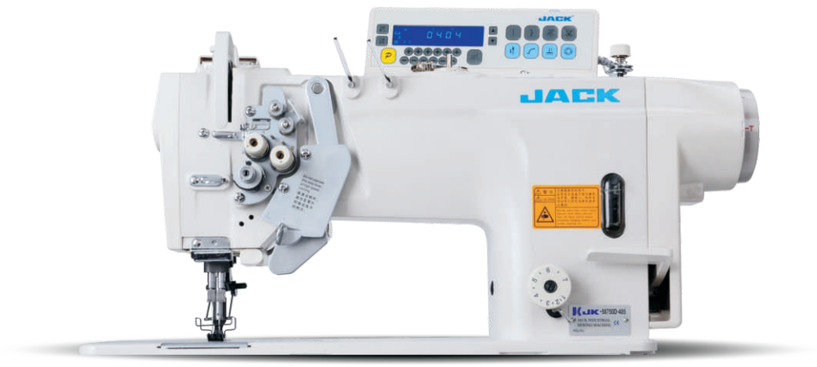

JK-58750D

Computerized Double Needle Lockstitch Machine
Large Capacity , High Efficiency

Advantages:



Super Large Operation Space

Super Large Hook

Clean and Beautiful Stitch

LED light

		(mm)	(mm)	(mm)	(S.p.m)				H	(mm)	NW/GW (kg)
JK-58420-003	DPX5 11-16#	4	1/4	7-13	4000					725×320×675	43/53.5
JK-58420-005	DPX5 14-22#	5	1/4	7-13	3000				✓	725×320×675	43/53.5
JK-58450-003	DPX5 11-16#	5	1/4	7-13	3000					725×320×675	43/53.5
JK-58450-005	DPX5 14-22#	5	1/4	7-13	3000				✓	725×320×675	43/53.5
JK-58720-003	DPX5 11-16#	7	1/4	7-13	3000			✓		725×320×675	43/53.5
JK-58720-005	DPX5 14-22#	7	1/4	7-13	3000			✓	✓	725×320×675	43/53.5
JK-58750-003	DPX5 11-16#	7	1/4	7-13	3000			✓		725×320×675	43/53.5
JK-58750-005	DPX5 14-22#	7	1/4	7-13	3000			✓	✓	725×320×675	43/53.5
JK-58420D-403	DPX5 11-16#	4	1/4	7-13	4000	✓	✓			725×320×675	50/60
JK-58420D-405	DPX5 14-22#	5	1/4	7-13	3000	✓	✓		✓	725×320×675	50/60
JK-58450D-403	DPX5 11-16#	5	1/4	7-13	3000	✓	✓			725×320×675	50/60
JK-58450D-405	DPX5 14-22#	5	1/4	7-13	3000	✓	✓		✓	725×320×675	50/60
JK-58720D-403	DPX5 11-16#	7	1/4	7-13	3000	✓	✓	✓		725×320×675	50/60
JK-58720D-405	DPX5 14-22#	7	1/4	7-13	3000	✓	✓	✓	✓	725×320×675	50/60
JK-58750D-403	DPX5 11-16#	7	1/4	7-13	3000	✓	✓	✓		725×320×675	50/60
JK-58750D-405	DPX5 14-22#	7	1/4	7-13	3000	✓	✓	✓	✓	725×320×675	50/60

JK-5559WE

Computerized Lockstitch Machine with Edge Trimmer
Integrated, Automatic Presser Foot Lifter

Advantages:



Automatic Presser Foot Lifter

26mm Dust Collector Space

Integrated, Easy to Install



LED light

			(mm)	(mm)	(mm)	(S.p.m)				(mm)	NW/GW (kg)
JK-5558B	DBX1 11-18#	2	1/8	5	5-13	4000				635x245x550	33.5/40.2
JK-5558WB	DBX1 11-18#	2	1/8	5	5-13	4000				635x245x550	33.5/40.2
JK-5559WE	DBX1 11-18#	2	1/8	5	5-13	4000	✓	✓	✓	645x248x550	36.5/42.5

JK-5558WB is power saving machine. “W” means semi-dry system.

JK-6380E-3B

Top and Bottom Feeding Computerized Lockstitch Machine
Integrated, Heavy Duty can be Sewing Smoothly.

Advantages:

Heavy Duty can be Sewing Smoothly



Automatic Thread Trimming

Integrated

			(mm)	(mm)	(S.p.m)				H	(mm)	NW/GW (kg)
JK-6380E-3B	DPX17 23#	2	8	8-16	2000	✓	✓	✓	✓	680×255×550	38/41.5
JK-6380B	DPX17 23#	2	8	8-16	2000			✓	✓	680×255×550	38/41.5
JK-6380	DPX17 23#	2	8	8-16	2000			✓	✓	680×255×550	38/41.5

JK-6380B is power saving machine.

JK-8560WD/8558WD

Power Saving Chain Stitch Machine
Integrated

Advantages:



Power Saving 71%

High Speed and Adjustable

Rear Puller Device (Optional)

LED Light

			(mm)	(mm)	(S.p.m)	(mm)	A	M	H	(mm)	NW/GW (kg)
JK-8558WD-1	TVX7 14#	4	4	8-10 mm	4000	3/16'',3/8'', 1/4'',1/8''	✓			615*245*565	33.5/41.5
JK-8558WD-2	TVX7 14#	2	4	8-10 mm	4000		✓			615*245*565	33.5/41.5
JK-8558WD-3	TVX7 14#	4	4	8-10 mm	4000		✓			615*245*565	33.5/41.5
JK-8560WD	TVX7 14#	6	4	8-10 mm	4000	1/8''		✓		615*245*565	33.5/41.5
JK-8560WD-PL	TVX7 18#	6	4	8-10 mm	4000	1/8''		✓		615*245*565	33.5/41.5
JK-8560WDH	TVX7 18#	6	4	8-10 mm	4000	1/8''			✓	615*245*565	33.5/41.5

The specification of JK-8560W/8558W series is same as JK-8560WD/8558WD series.

Interlock Machine Series

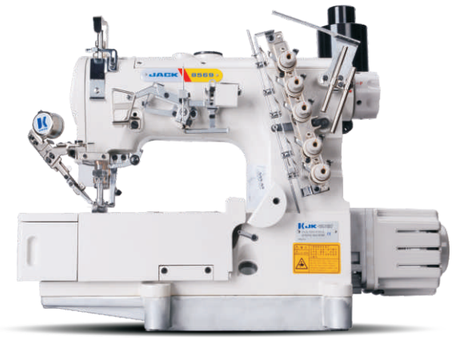

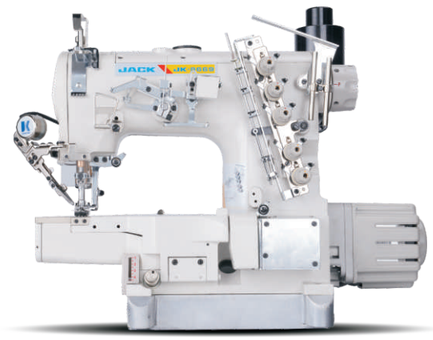

JK-8569C-01GB/UT

Computerized Flat-bed Interlock Machine
Automatic Operation, High Efficiency

JK-8669C-01GB/UT

Computerized Cylinder-bed Interlock Machine
Automatic Operation, High Efficiency

Advantages:

Automatic Thread Trimming

Automatic Presser Foot Lifter

Advantages:



Shortened Cylinder Bed 24mm

Out Moved Thread Cam

				(mm)	(mm)		(mm)	(S.p.m)	UT		(mm)	NW/GW (kg)
JK-8569C-01GB/UT	11#/14#	3	5	1.5-4.4	5.6/6.4	0.65-1.3	5	5000	✓	✓	680×420×630	50/61
JK-8569ADⅡ-01GB/UT	11#/14#	3	5	1.5-4.4	5.6/6.4	0.65-1.3	5	5000	✓	✓	680×420×630	50/61
JK-8569ADⅡ-23GBL/UT	14#	2	4	7.5	5.6/6.4	1	5	4500	✓	✓	680×420×630	50/61
JK-8669C-01GB/UT	11#/14#	3	5	1.5-4.5	5.6/6.4	0.8-1.3	5	5000	✓	✓	680×420×630	50/61
JK-8669DⅡ-01GB/UT	11#/14#	3	5	1.5-4.5	5.6/6.4	0.6-1.3	5	5000	✓		680×420×630	50/61
JK-8669DⅡ-35AC/UT	11#/14#	3	5	1.5-4.5	5.6/6.4	0.6-1.3	5.8	5000	✓		680×420×750	54/64

"C" means new version

JK-8569ADI

Power Saving Flat-bed Interlock Machine

Advantages:



Power Saving 71%

High Speed and Adjustable

Out Moved Thread Cam

LED Light

				(mm)	(mm)		(mm)	(S.p.m)		(mm)	NW/GW (kg)
JK-8569ADⅠ-01GB	11#/14#	3	5	1.5-4.4	5.6/6.4	0.65-1.3	5	6000	✓	630×390×630	45/57.5
JK-8569ADⅠ-02BB	11#/14#	3	5	1.5-4.4	5.6/6.4	0.65-1.3	5	6000	✓	630×390×630	45/57.5
JK-8569ADⅠ-03DB	11#/14#	3	5	1.5-4.4	5.6/6.4	0.65-1.3	5	6000	✓	630×390×630	45/57.5
JK-8569ADⅠ-05CB	11#/14#	3	5	1.5-4.4	5.6/6.4	0.65-1.3	5	5000	✓	630×390×630	45/57.5
JK-8569ADⅠ-07CB	11#/14#	3	5	1.5-4.4	5.6/6.4	0.65-1.3	5	5000	✓	630×390×630	45/57.5
JK-8569ADⅠ-08AC	11#/14#	3	5	1.5-4.4	5.6/6.4	0.65-1.3	5	6000	✓	630×390×630	45/57.5
JK-8569AZDⅠ-01/02/03/08	11#/14#	3	5	1.5-4.4	5.6/6.4	0.65-1.3	5	6000	✓	630×390×630	45/57.5
JK-8569ADⅠ-23GB	14#	3	5	6	5.6/6.4	0.65-1.3	5	4500	✓	630×390×630	45/57.5
JK-8569ADⅠ-23BB	14#	3	5	6	5.6/6.4	0.65-1.3	7	4500	✓	630×390×630	45/57.5
JK-8569ADⅠ-23GBL	14#	2	4	7.5	5.6/6.4	1	5	4500	✓	630×390×630	45/57.5
JK-8569ADⅠ-23BBL	14#	2	4	7.5	5.6/6.4	1	7	4500	✓	630×390×630	45/57.5

The specification of JK-8569/8669 series is same as JK-8569ADI/8669BDI series.

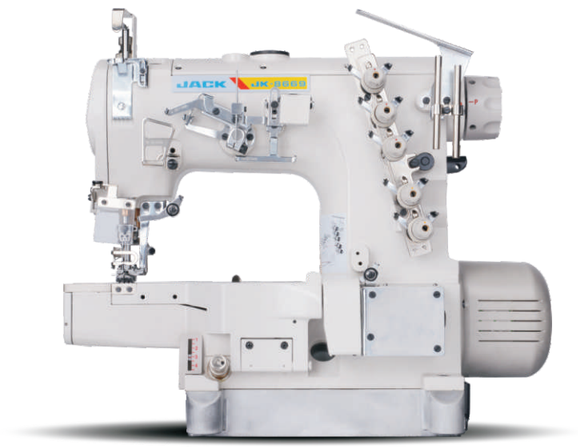

JK-8669BDI

Power Saving Cylinder-bed Interlock Machine

Advantages:



Shortened Cylinder Bed 24mm



Power Saving 71%

High Speed and Adjustable



LED Light

				(mm)	(mm)		(mm)	(S.p.m)		(mm)	NW/GW (kg)
JK-8669BDⅠ-01GB	11#/14#	3	5	1.5-4.5	5.6/6.4	0.8-1.3	5	6000	✓	630×390×630	45/57.5
JK-8669Dⅰ-01GB	11#/14#	3	5	1.5-4.5	5.6/6.4	0.6-1.3	5	6000		630×390×630	45/57.5
JK-8669Dⅰ-02BB	11#/14#	3	5	1.5-4.5	5.6/6.4	0.6-1.3	5	6000		630×390×630	45/57.5
JK-8669Dⅰ-03FB	11#/14#	3	5	1.5-4.5	5.6/6.4	0.6-1.3	5	6000		630×390×630	45/57.5
JK-8669Dⅰ-03GB	11#/14#	3	5	1.5-4.5	5.6/6.4	0.6-1.3	5	6000		630×390×630	45/57.5
JK-8669Dⅰ-08AC	11#/14#	3	5	1.5-4.5	5.6/6.4	0.6-1.3	5	6000		630×390×630	45/57.5
JK-8669Dⅰ-35AC	11#/14#	3	5	1.5-4.5	5.6/6.4	0.6-1.3	5.8	5000		630×390×750	45/57.5

The specification of JK-8669 series is same as JK-8669BDI series.

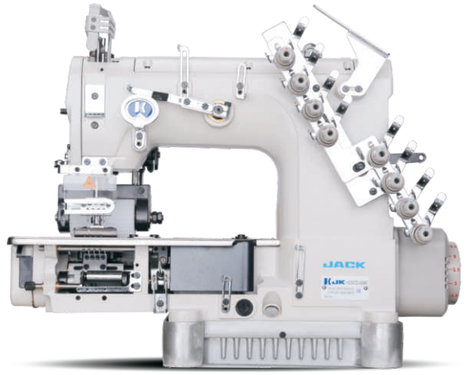

JK-8009VCDI

Power Saving Multi-needle Machine

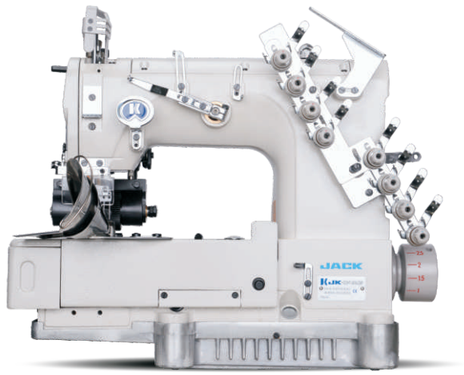

JK-8009HF

Four Needles Chain Stitch Machine

Advantages:



Power Saving 71%



Rear Puller Device (Optional)

Advantages:

Equipped with Folder



Rear Puller Device (Standard)

				(mm)	(mm)	(mm)	(S.p.m)	(mm)	NW/GW (kg)
JK-8009VC-04064P	UO113 14-16#	4	8	1/4"	1.4-4.2	8	3500	615×400×605	50\55
JK-8009VC-04080P	UO113 14-16#	4	8	5/16"	1.4-4.2	8	3500	615×400×605	50\55
JK-8009VC-04085P	UO113 14-16#	4	8	11/32"	1.4-4.2	8	3500	615×400×605	50\55
JK-8009VC-04095P	UO113 14-16#	4	8	3/8"	1.4-4.2	8	3500	615×400×605	50\55
JK-8009VC-06048P	UO113 14-16#	6	12	3/16"	1.4-4.2	8	3500	615×400×605	50\55
JK-8009VC-06064P	UO113 14-16#	6	12	1/4"	1.4-4.2	8	3500	615×400×605	50\55
JK-8009VC-06080P	UO113 14-16#	6	12	5/16"	1.4-4.2	8	3500	615×400×605	50\55
JK-8009VC-06095P	UO113 14-16#	6	12	3/8"	1.4-4.2	8	3500	615×400×605	50\55
JK-8009VC-08032P	UO113 14-16#	8	16	1/8"	1.4-4.2	8	3500	615×400×605	50\55
JK-8009VC-08048P	UO113 14-16#	8	16	3/16"	1.4-4.2	8	3500	615×400×605	50\55
JK-8009VC-08064P	UO113 14-16#	8	16	1/4"	1.4-4.2	8	3500	615×400×605	50\55
JK-8009VC-08085P	UO113 14-16#	8	16	11/32"	1.4-4.2	8	3500	615×400×605	50\55
JK-8009VC-08095P	UO113 14-16#	8	16	3/8"	1.4-4.2	8	3500	615×400×605	50\55
JK-8009VC-12032P	UO113 14-16#	12	24	1/8"	1.4-4.2	8	3500	615×400×605	50\55
JK-8009VC-12048P	UO113 14-16#	12	24	3/16"	1.4-4.2	8	3500	615×400×605	50\55
JK-8009VC-12064P	UO113 14-16#	12	24	1/4"	1.4-4.2	8	3500	615×400×605	50\55
JK-8009VC-13064-32P	UO113 14-16#	13	36	1/4" -1/8"	1.4-4.2	8	3500	615×400×605	50\55
JK-8009VC-17032P	UO113 14-16#	17	34	1/8"	1.4-4.2	8	3500	615×400×605	50\55
JK-8009VC-23032P	UO113 14-16#	23	46	1/8"	1.4-4.2	8	3500	615×400×605	50\55
JK-8009VC-25032P	UO113 14-16#	25	50	1/8"	1.4-4.2	8	3500	615×400×605	50\55
JK-8009HF-04064-254P	TVX5 19-21#	4	8	1/4" -1"-1/4"	1.4-3.6	12.5	3500	615×400×605	50\55

The specification of JK-8009VC series is same as JK-8009VCDI series.

Special Machine Series

JK-T10080

Programmable Electronic Large Area Pattern Sewing Machine
Automatic Operation, High Efficiency

Advantages:

Quick Pattern Replacement

Infrared Scanning Automatic Identification

One Key Start Operation

Capable for Kinds of Fabrics

					(mm)	(S.p.m)	(mm)	NW/GW (kg)
JK-T12080	DPX5 7-16#	1	2	1150×770	17	2300	1920x1620x1440	446/542
JK-T12040	DPX17 9-25#	1	2	1150×400	22	2500	1920x1620x1440	364/458
JK-T10080	DPX5 7-16#	1	2	1000×770	17	2300	1920x1620x1440	446/542
JK-T10040	DPX17 9-25#	1	2	1000×400	22	2500	1920x1620x1440	364/458

JK-T3020

Programmable Electronic Pattern Sewing Machine
Easy Operation, High Efficiency

Advantages:

Automatic Operation

Pocket Attaching Function (Optional)



Quick Pattern Replacement



Heavy Fabrics can be Sewing Smoothly

					(mm)	(S.p.m)	(mm)	NW/GW (kg)
JK-T3020	DP×17 14-25#	1	2	300×200	22	2700	1220x1220x1320	219/278
JK-T3020TDB	DP×17 14-25#	1	2	300×200	22	2700	1220x1220x1320	219/278
JK-T2210	DP×17 14-25#	1	2	220×100	22	2700	1220x840x1320	139/183
JK-T1310	DP×17 14-25#	1	2	130×100	22	2700	1220x840x1320	139/183
JK-T6040	DP×17 14-25#	1	2	600×400	22	2500	1920x1620x1440	347/443

JK-T5878-68

Automatic Pocket Welting Machine
High Efficiency, High Production Capacity

Advantages:

Smart Touchable Panel



Exactly Fabric Cutting

Bobbin thread Shortage Alarm



Triple Feeding Good Positioning

						(S.p.m)	(mm)	NW/GW (kg)
JK-T5878-68	MTX190 14-18#（Standard 16#）	2	3	8-20	18-220	3000	1200x1600x1500	240/350
JK-T5878-78	DPX17 14-18#（Standard 16#）	2	3	8-20	18-220	3000	1200x1600x1500	240/350

JK-T5878-58B

Automatic Placket Setting Machine
High Efficiency, High Production Capacity

Advantages:

Different Patterns

Smart Touchable Panel

Movable Machine Head



Infrared Positioning,
Accurate Operation

						(S.p.m)	(mm)	NW/GW (kg)
JK-T5878-58B	DBX1 11-14#（Standard 11#）	1	2	1-50	10-280	4000	1100x2100x1600	200/300

JK-T1900BSK/1903BSK

Electronic Bartacking & Button Attaching Machine
One Machine, Multi Functions

Advantages:

Bartacking & Button Attaching
Easy to Transfer

Key Panel
(Touchable Panel Optional)

Heavy Duty can be
Sewing Smoothly



JK-T1906B Small Pattern Sewing
JK-T1904B Elastic Attaching

				(mm)	(mm)			(mm)	(S.p.m)	(mm)	NW/GW (kg)
JK-T1900BSK	DPX5 16#	1	2	40	30	✓	✓	13	3000	805x375x760	45/64.5
JK-T1900BHK	DPX17 19#	1	2	40	30	✓	✓	13	3000	805x375x760	45/64.5
JK-T1900BMK	DPX5 11#	1	2	40	30	✓	✓	13	3000	805x375x760	45/64.5
JK-T1900BS	DPX5 16#	1	2	40	30	✓	✓	13	3000	805x375x760	45/64.5
JK-T1900BH	DPX17 19#	1	2	40	30	✓	✓	13	3000	805x375x760	45/64.5
JK-T1900BM	DPX5 11#	1	2	40	30	✓	✓	13	3000	805x375x760	45/64.5
JK-T1900BLX	DPX5 16#	1	2	40	30	✓	✓	13	3000	805x375x760	45/64.5
JK-T1904BS	DPX17 14#	1	2	60	40	✓	✓	13	2700	805x375x760	45/64.5
JK-T1906BS	DPX17 14#	1	2	60	40	✓	✓	13	2700	805x375x760	45/64.5

				mm				(mm)	(S.p.m)	(mm)	NW/GW (kg)
JK-T1903BSK	DPX17 14#	1	2	ϕ8-ϕ30	"X:2.4-6.8; Y:2.4-6.8"	✓	✓	13	2700	805×375×760	45/64.5
JK-T1903B	DPX17 14#	1	2	ϕ8-ϕ30	"X:2.4-6.8; Y:2.4-6.8"	✓	✓	13	2700	805×375×760	45/64.5

JK-T1790B

Electronic lockstitch Buttonholing Machine
Low Noisy, High Efficiency, Beautiful Stitches

Advantages:

Patterns are Easy to Update

Dry Head System



Basting Stitch Function

Cooling System, Long Durability

	(mm)							(mm)	(S.p.m)	(mm)	NW/GW (kg)
JK-T1790BS-1	25×4	DPX5 12#	1	1/4"~3/4"	2	0.2~2.5	220V	17	4200	780×390×830	56/77
JK-T1790BS-2	35×5	DPX5 12#	1	1/4"~1"	2	0.2~2.5	220V	17	4200	780×390×830	56/77
JK-T1790BS-3	41×5	DPX5 12#	1	1/4"~1 1/4"	2	0.2~2.5	220V	17	4200	780×390×830	56/77
JK-T1791BS	70×5	DPX5 12#	1	1/4"~1 1/4"	2	0.2~2.5	220V	17	4200	780×390×830	56/77
JK-T1792BS	120×5	DPX5 12#	1	1/4"~1 1/4"	2	0.2~2.5	220V	17	4200	780×390×830	56/77
JK-T1790BK-1	25×4	DPX5KN 11#	1	1/4"~3/4"	2	0.2~2.5	220V	17	4200	780×390×830	56/77
JK-T1790BK-2	35×5	DPX5KN 11#	1	1/4"~1"	2	0.2~2.5	220V	17	4200	780×390×830	56/77
JK-T1790BK-3	41×5	DPX5KN 11#	1	1/4"~1 1/4"	2	0.2~2.5	220V	17	4200	780×390×830	56/77
JK-T1791BK	70×5	DPX5KN 11#	1	1/4"~1 1/4"	2	0.2~2.5	220V	17	4200	780×390×830	56/77
JK-T1792BK	120×5	DPX5KN 11#	1	1/4"~1 1/4"	2	0.2~2.5	220V	17	4200	780×390×830	56/77

"K" is for knitting fabrics
"S" is for woven fabrics

JK-T1377E

Integrated Electronic Button Attaching Machine
Automatic Operation, High Efficiency

Advantages:



Three Patterns Easy to Change

Integrated, Power Saving

Automatic Thread Trimming
Automatic Presser Foot Lifter

Operation Panel

				mm	x y			(mm)	(S.p.m)	(mm)	NW/GW (kg)
JK-T1377E	TQX1 #16(#14~#18) TQX7 #16(#14~#18)	1	1	10~28	X (2.5~6.5mm) Y (0 , 2.5~6.5)	✓	✓	9	1500	630x470x440	35/45
JK-T1377	TQX1 #16(#14~#18) TQX7 #16(#14~#18)	1	1	10~28	X (2.5~6.5mm) Y (0 , 2.5~6.5)	✓	✓	9	1500	550x390x360	30/40

JK-T781E

Integrated Electronic Lockstitch Buttonholing Machine
Automatic Operation, High Efficiency

Advantages:

Beautiful Stitches

Integrated, Power Saving

Automatic Thread Trimming
Automatic Presser Foot Lifter

Easy to Operate

	(mm)								(mm)	(S.p.m)	(mm)	NW/GW (kg)
JK-T781E	22×4	DPX5 12#	1	1/4"~3/4"	2	0.2~2.5	✓	✓	12	3600	685×365×685	46/66
JK-T782E	33×5	DPX5 12#	1	1/4"~1"	2	0.2~2.5	✓	✓	12	3600	685×365×685	46/66
JK-T783E	40×5	DPX5 12#	1	1/4"~1 1/4"	2	0.2~2.5	✓	✓	12	3600	685×365×685	46/66
JK-T781EK	22×4	DPX5 12#	1	1/4"~3/4"	2	0.2~2.5	✓	✓	12	3600	685×365×685	46/66

JK-781D is power saving machine.

JK-T9270D

Power Saving Feed-off- the Arm Machine
Integrated

Advantages:



Power Saving 71%

High Speed and Adjustable



Cantilever Cylindrical Structure

Rear Puller Device
(PS/PL Optional)

				(mm)	(mm)	A	M	H	(S.p.m)	(mm)	NW/GW (kg)
JK-T9270-12(1/4)	TVX64NY 12#	2	4	3.5	8	✓			4000	580x535x475	40/55
JK-T9270-12(3/16)	TVX64NY 12#	2	4	3.5	8	✓			4000	580x535x475	40/55
JK-T9270-12-2PL(1/4)	TVX64NY 12#	2	4	3.5	8	✓			4000	580x535x475	40/55
JK-T9270-12-2PL(3/16)	TVX64NY 12#	2	4	3.5	8	✓			4000	580x535x475	40/55
JK-T9270-12-2PS(1/4)	TVX64NY 12#	2	4	3.5	8	✓			4000	580x535x475	40/55
JK-T9270-12-2PS(3/16)	TVX64NY 12#	2	4	3.5	8	✓			4000	580x535x475	40/55
JK-T9270-13(1/8)	TVX64NY 12#	3	6	3.5	8	✓			4000	580x535x475	40/55
JK-T9270-13-2PL(1/8)	TVX64NY 12#	3	6	3.5	8	✓			4000	580x535x475	40/55
JK-T9270-22(1/4)	TVX64NY 14#	2	4	3.5	8		✓		4000	580x535x475	40/55
JK-T9270-22(3/16)	TVX64NY 14#	2	4	3.5	8		✓		4000	580x535x475	40/55
JK-T9280-53(1/8)	TVX5NY 21#	3	6	4.2	10			✓	3600	580x535x475	40/59
JK-T9280-73-2PL(1/8)	TVX5NY 21#	3	6	4.2	10			✓	3600	580x535x475	40/59
JK-T9280-73-PL(1/8)	TVX5NY 21#	3	6	4.2	10			✓	3600	580x535x475	40/59
JK-T9280-73-PS(1/8)	TVX5NY 21#	3	6	4.2	10			✓	3600	580x535x475	40/59

The specification of JK-T9270/9280 series is same as JK-T9270D/9280D series

JK-513A

Power Saving Servo Motor

Advantages:



Power Saving 71%

High Speed, Rapid Response,
High Efficiency

Low Temperature, Low Vibration,
Low Noisy

Model			Nm	(S.p.m)		(mm)	NW/GW (kg)
JK-513A	220V	550W	1-3.5	5000	✓	535x335x195	8.2/10.8
JK-563A	220V	750W	1-3.5	3500	✓	535x335x195	8.2/10.8